

Tunnel LED Lighting




LED 터널등

- Top rate energy saving
- Excellent luminous efficiency
- Consistent color rendering
- Light weight
- Effortless installation
- Quality waterproof part

LED Aurora



PRODUCT SPECIFICATION

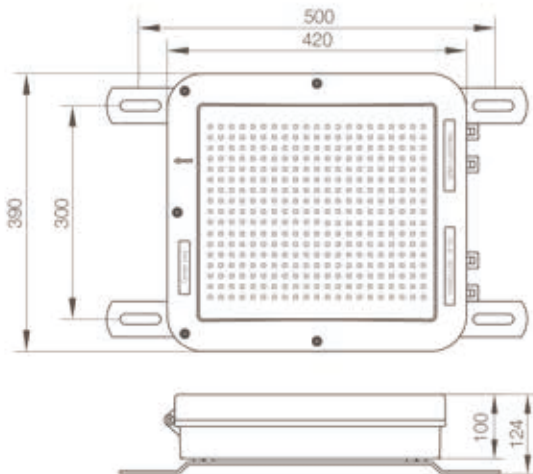

PRODUCT CONTENTS

Model No.	STANDARD TYPE	
	AUT-L60 (AUR-TN-L60)	AUT-L120 (AUR-TN-L120)
Power	60W	120W
Replaced	HPS 250W	HPS 400W
Energy saving	80%	80%
Certificate	KS, High-Efficiency	
Luminous efficiency	154lm/W±10%	162lm/W±10%
Total luminous flux	9,240lm±10%	19,440lm±10%

Type	Built-in, SMPS
Protection	IP66
Ambient temp.	-30~+70°C
Weight	10kg
Warranty	3 Years
Rated voltage	AC 100~240V
Frequency	50HZ ~ 60HZ
Power factor	MIN, 90%
CCT	5,000K±10%
CRI	85±5%
Beam angle	60°, 120°
Body & Cover	Cast Aluminum Alloy
Front cover	Heat resistant hard glass
ACC	SUS

CERTIFICATION



High Efficiency
Certificate




KS Certificate



Korean Women
Entrepreneurs
Association

PHOTOMETRIC DATA

Photometric data-60



Photometric data-120

