

# Roadway LED Lighting





LED 가로등

- Top rate energy saving
- Excellent luminous efficiency
- Consistent color rendering
- Light weight
- Effortless installation
- Quality waterproof part

## LED Diana



### PRODUCT SPECIFICATION

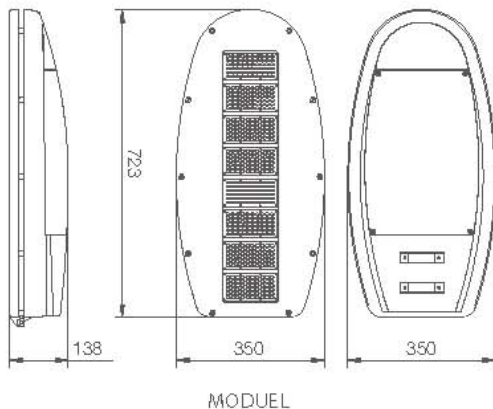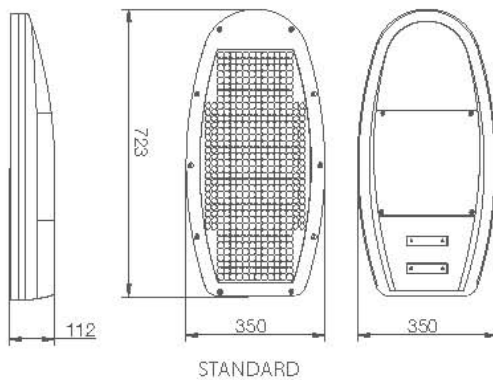

### PRODUCT CONTENTS

Model No.	STANDARD TYPE		MODULE TYPE	
	DIA-L70 (DIA-RD-L70)	DIA-L80 (DIA-RD-L80)	DIA-L100M (DIA-RE-L100)	DIA-L200M (DIA-RE-L200)
Power	70W	80W	100W	150W
Replaced	MH300W	MH400W	MH400W	MH700W
Certificate	KS	KS	KS	KS(In progress)
Luminous Efficiency	140lm/W ±10%	142lm/W ±10%	140lm/W ±10%	140lm/W ±10%
Total luminous flux	9,800lm ±10%	11,360lm ±10%	14,000lm ±10%	21,000lm ±10%
Weight	8.8kg	8.8kg	7.1kg	8.6kg

Type	External. SMPS
Protection	IP 66
Ambient Temp	-20~+40°C
Arm size	62Ø
Warranty	3 Years
Rated Voltage	AC 100~240V
Frequency	50HZ ~ 60HZ
Power factor	MIN, 90%
CCT	5,000K±10%
CRI	85±5%
Beam angle	120°
Body & Cover	Cast Aluminum Alloy
Front cover	Heat resistant hard glass
ACC	SUS

### CERTIFICATION



KS Certificate



Korean Women  
Entrepreneurs  
Association