

# Explosion Proof LED Lighting Fixture (Exd IIB)



LED 내압 방폭등

- Top rate energy saving
- Excellent luminous efficiency
- Consistent color rendering
- Light weight
- Effortless installation
- Quality waterproof part




## LED Exd IIB+H2 T6 IP66 For Zone1



### PRODUCT CONTENTS

Model No.	Exd-IIB T6-L60-120		
Power	30W	45W	60W
Replaced	MH 175W	MH 250W	MH 400W
Energy saving	85%	85%	85%
Luminous Efficiency	150lm/W±10%	150lm/W±10%	157lm/W±10%
Total luminous flux	4,500lm±10%	6,750lm±10%	9,420lm±10%
Type	Built-in, SMPS		
Protection	Exd IIB+H2 T6 IP66		
Ambient Temp	-20~+40°C		
Weight	9.5Kg±5%		
Warranty	3 Years		
Rated Voltage	AC 100~240V		
Frequency	50HZ ~ 60HZ		
Power factor	MIN, 90%		
CCT	5,000K±10%		
CRI	85±5%		
Beam angle	60°, 120°		
Descriptions	Materials		
Body & Cover	Cast Aluminum Alloy		
Front cover	Heat resistant hard glass		
SMPS	Constant Current		
ACC	SUS		

### PHOTOMETRIC DATA

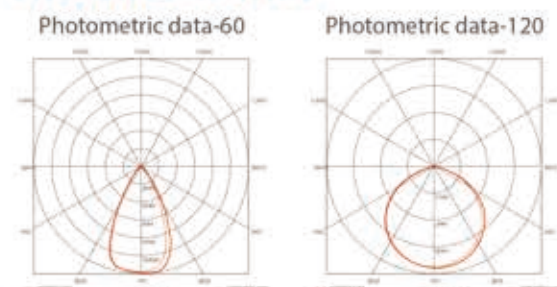

### CERTIFICATION



## LED Exd IIB+H2 T6 IP66 For Zone1

### PRODUCT SPECIFICATION

