



Non-Sparking LED Lighting Fixture (Ex nA)


- Top rate energy saving
- Excellent luminous efficiency
- Consistent color rendering
- Light weight
- Effortless installation
- Quality waterproof part

LED 비점화 방폭 투광등

LED Ex nA II T5 IP66 For Zone2(Aurora)



PRODUCT SPECIFICATION

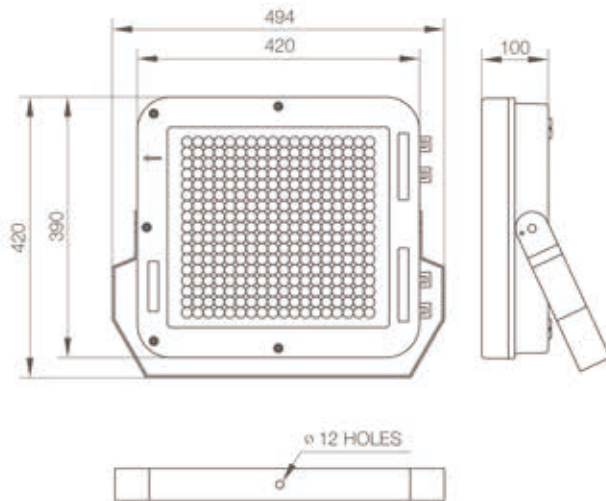

PRODUCT CONTENTS


Model No.	nA-L120
Power	120W
Replaced	MH 400W
Energy saving	85%
Luminous efficiency	162lm/W±10%
Total luminous flux	19,440lm±10%
Type	Built-in, SMPS
Protection	Ex nA II T5 IP66 For Zone 2
Ambient temp.	-20~+40°C
Weight	8Kg±5%
Warranty	3 Years
Rated voltage	AC 100~240V
Frequency	50HZ ~ 60HZ
Power factor	MIN, 90%
CCT	5,000K±10%
CRI	85±5%
Beam angle	120°
Descriptions	Materials
Body & Cover	Cast Aluminum Alloy
Front cover	Heat resistant hard glass
SMPS	Constant Current
ACC	SUS

CERTIFICATION



PHOTOMETRIC DATA

Photometric data-60

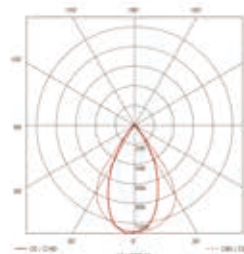

Photometric data-120

