

Non-Sparking LED Lighting Fixture (Ex nR Head Only)



LED 비점화 방폭등

- Top rate energy saving
- Excellent luminous efficiency
- Consistent color rendering
- Light weight
- Effortless installation
- Quality waterproof part

Non-Sparking
LED Lighting Fixture


LED Ex nR II T5 IP66 For Zone2(Head Only)



PRODUCT CONTENTS

Model No.	nR-L60-120-H		
Power	30W	45W	60W
Replaced	MH 175W	MH 250W	MH 400W
Energy saving	85%	85%	85%
Luminous efficiency	150lm/W±10%	150lm/W±10%	157lm/W±10%
Total luminous flux	4,500lm±10%	6,750lm±10%	9,420lm±10%

PRODUCT SPECIFICATION

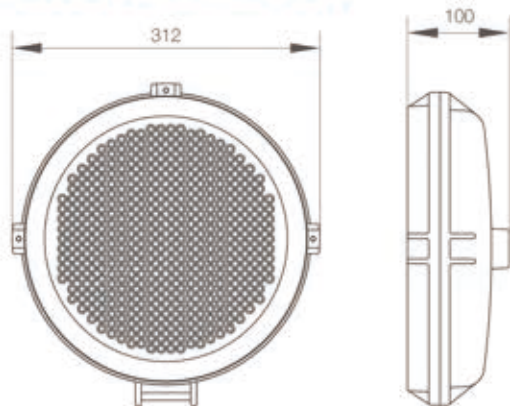

Type	Built-in, SMPS
Protection	Ex nR II T5(IP66) For Zone 2
Ambient temp.	-20~+40°C
Weight	4Kg±5%
Warranty	3 Years
Rated voltage	AC 100~240V
Frequency	50HZ ~ 60HZ
Power factor	MIN, 90%
CCT	5,000K±10%
CRI	85±5%
Beam angle	60°, 120°
Descriptions	Materials
Body & Cover	Cast Aluminum Alloy
Front cover	Heat resistant hard glass
SMPS	Constant Current
ACC	SUS

CERTIFICATION



PHOTOMETRIC DATA

